

TORNADO
TIRE



BORN FROM THE STORM

BUILT FOR THE ROAD

TORNADO PRODUCT CATALOG 2026

PASSENGER & LIGHT TRUCK TIRE
PRODUCT DATA

TABLE OF CONTENTS

04

THUNDERSTORM

TS-001 SUMMER - UHP

06

HAILSTORM

HS-001 ALL - SEASON - UHP

09

SANDSTORM

SS-001 ALL - SEASON - HP

12

DUSTSTORM

DS-001 PCR & LTR - HT

14

WINDSTORM

WS-001 LTR - RT

17

TROPICALSTORM

TP-001 LTR - RT

19

STORMRIDER

SR-001 LTR - MT

WHY



TORNADO
TIRE

engineered to deliver dependable performance, enhanced comfort, and confident handling for everyday driving. Designed with durable construction, reliable traction, and a smooth, quiet ride, TORNADO provides the quality and stability drivers expect — all at an exceptional value.





THUNDERSTORM

■ TS-001

Summer-UHP

Brand-New Sporty Asymmetric UHP Pattern

■ FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'15-22'



'35-55'



Asymmetric

Treadwear	Traction	Temperature	Speed	Load Index
320	AA	A	VWY	----



Benefits

- Short-distance braking on wet and dry surfaces
- Ultimate grip, excellent dry and wet handling
- Strong tractive effort in multiple scenarios
- Superior wear resistance



THUNDERSTORM

Thunderstorm | TS-001 | Summer - UHP

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
15		195/50R15		82V	BSW	7.9	22.7	51	1047	9	6		320 AA A
		195/55R15		85V	BSW	7.9	23.4	51	1135	9	6		320 AA A
16		195/55R16		91V	BSW	7.9	24.4	50	1356	9	6		320 AA A
		205/55ZR16		94W	BSW	8.4	24.9	50	1477	9	6.5		320 AA A
17		195/40ZR17		81W	BSW	7.9	23.1	50	1019	9	7		320 AA A
		205/40ZR17		84W	BSW	8.3	23.5	50	1102	9	7.5		320 AA A
		205/45ZR17		88W	BSW	8.1	24.3	50	1235	9	7		320 AA A
		215/45ZR17		91W	BSW	8.4	24.6	50	1356	9	7		320 AA A
		225/45ZR17		94Y	BSW	8.9	25.0	50	1477	9	7.5		320 AA A
		205/50ZR17		93W	BSW	8.4	25.1	50	1433	9	6.5		320 AA A
		215/50ZR17		95W	BSW	8.9	25.5	50	1521	9	7		320 AA A
		225/50ZR17		98W	BSW	9.2	25.9	50	1653	9	7		320 AA A
		205/55ZR17		95W	BSW	8.4	25.9	50	1521	9	6.5		320 AA A
		215/55ZR17		98W	BSW	8.9	26.3	50	1653	9	7		320 AA A
18		225/55ZR17		101W	BSW	9.2	26.8	50	1819	9	7		320 AA A
		235/55ZR17		103W	BSW	9.6	27.2	50	1929	9	7.5		320 AA A
		225/40ZR18		92Y	BSW	9.1	25.1	50	1389	9	8		320 AA A
		225/45ZR18		95Y	BSW	8.9	25.9	50	1521	9	7.5		320 AA A
		235/45ZR18		98Y	BSW	9.3	26.3	50	1653	9	8		320 AA A
		245/45ZR18		100Y	BSW	9.6	26.7	50	1764	9	8		320 AA A
		225/50ZR18		99W	BSW	9.2	26.9	50	1709	9	7		320 AA A
		235/50ZR18		101W	BSW	9.6	27.3	50	1819	9	7.5		320 AA A
		215/55ZR18		99W	BSW	8.9	27.3	50	1709	9	7		320 AA A
		225/55ZR18		102W	BSW	9.2	27.8	50	1874	9	7		320 AA A
19		235/55ZR18		104W	BSW	9.6	28.1	50	1984	9	7.5		320 AA A
		235/35ZR19		91Y	BSW	9.5	25.5	50	1356	9	8.5		320 AA A
		235/40ZR19		96Y	BSW	9.5	26.4	50	1565	9	8.5		320 AA A
		245/40ZR19		98Y	BSW	9.8	26.7	50	1653	9	8.5		320 AA A
		235/45ZR19		99Y	BSW	9.3	27.4	50	1709	9	8		320 AA A
		245/45ZR19		102Y	BSW	9.6	27.7	50	1874	9	8		320 AA A
		225/55ZR19		103W	BSW	9.2	28.8	50	1929	9	7		320 AA A
		235/55ZR19		105W	BSW	9.6	29.2	50	2039	9	7.5		320 AA A
20		245/40ZR20		99Y	BSW	9.8	27.7	50	1709	9	8.5		320 AA A
		245/45ZR20		103Y	BSW	9.6	28.7	50	1929	9	8		320 AA A
		265/50ZR20		111W	BSW	10.9	30.5	50	2403	9	8.5		320 AA A
		285/50ZR20		116W	BSW	11.7	31.3	50	2756	9	9		320 AA A
22		285/35ZR22		106W	BSW	11.4	29.9	50	2094	9	10		320 AA A
		265/40ZR22		106Y	BSW	10.7	30.4	50	2094	9	9.5		320 AA A



HAILSTORM

■ HS-001

All-Season - UHP

Brand-New All-Season Asymmetric UHP Pattern



FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'16-24'



'30-55'



Asymmetric

Treadwear	Traction	Temperature	Speed	Load Index
560	A	A	V W Y	----

Benefits

- Ultimate grip. Excellent dry and wet handling.
- Reduce section deformation to improve driving safety and maneuverability
- Enhance M S performance and traction on snowy surface.
- Reduce the deformation to lower rolling resistance.



HAILSTORM

Hailstorm | HS-001 | All-season - UHP

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
16		205/55ZR16		94W	BSW	8.4	24.9	50	1477	9	6.5		560 A A
		215/55ZR16		97W	BSW	8.9	25.3	50	1609	9	7		560 A A
		245/40ZR17		95W	BSW	9.8	24.7	50	1521	9	8.5		560 A A
		215/45ZR17		91W	BSW	8.4	24.6	50	1356	9	7		560 A A
		225/45ZR17		94W	BSW	8.9	25.0	50	1477	9	7.5		560 A A
17		235/45ZR17		97W	BSW	9.3	25.4	50	1609	9	8		560 A A
		205/50ZR17		93W	BSW	8.4	25.1	50	1433	9	6.5		560 A A
		215/50ZR17		95W	BSW	8.9	25.5	50	1521	9	7		560 A A
		225/50ZR17		98W	BSW	9.2	25.9	50	1653	9	7		560 A A
		235/50ZR17		100W	BSW	9.6	26.3	50	1764	9	7.5		560 A A
		245/50ZR17		99W	BSW	10.0	26.7	51	1709	9	7.5		560 A A
		215/55ZR17		98W	BSW	8.9	26.3	50	1653	10	7		560 A A
		225/55ZR17		101W	BSW	9.2	26.8	50	1819	9	7		560 A A
		235/55ZR17		103W	BSW	9.6	27.2	50	1929	9	7.5		560 A A
		225/35ZR18		87Y	BSW	9.1	24.2	50	1201	9	8		560 A A
18		255/35ZR18		94Y	BSW	10.2	25.0	50	1477	9	9		560 A A
		265/35ZR18		97Y	BSW	10.7	25.3	50	1609	9	9.5		560 A A
		225/40ZR18		92W	BSW	9.1	25.1	50	1389	9	8		560 A A
		235/40ZR18		95W	BSW	9.5	25.4	50	1521	9	8.5		560 A A
		245/40ZR18		97W	BSW	9.8	25.7	50	1609	9	8.5		560 A A
		225/45ZR18		95W	BSW	8.9	25.9	50	1521	9	7.5		560 A A
		235/45ZR18		98W	BSW	9.3	26.3	50	1653	9	8		560 A A
		245/45ZR18		100W	BSW	9.6	26.7	50	1764	9	8		560 A A
		225/50ZR18		99W	BSW	9.2	26.9	50	1709	9	7		560 A A
		235/50ZR18		101W	BSW	9.6	27.3	50	1819	9	7.5		560 A A
19		225/55ZR18		102W	BSW	9.2	27.8	50	1874	9	7		560 A A
		235/55ZR18		104W	BSW	9.6	28.1	50	1984	9	7.5		560 A A
		235/35ZR19		91Y	BSW	9.5	25.5	50	1356	9	8.5		560 A A
		255/35ZR19		96Y	BSW	10.2	26.0	50	1565	9	9		560 A A
		225/40ZR19		93Y	BSW	9.1	26.1	50	1433	9	8		560 A A
		235/40ZR19		96W	BSW	9.5	26.4	50	1565	9	8.5		560 A A
		245/40ZR19		98W	BSW	9.8	26.7	50	1653	9	8.5		560 A A
		245/45ZR19		102W	BSW	9.6	27.7	50	1874	9	8		560 A A
		275/45ZR19		108Y	BSW	10.7	28.8	50	2205	9	9		560 A A
		225/55ZR19		103W	BSW	9.2	28.8	50	1929	9	7		560 A A
20		235/55ZR19		105W	BSW	9.6	29.2	50	2039	9	7.5		560 A A
		225/35ZR20		90Y	BSW	9.1	26.2	50	1323	9	8		560 A A
		245/35ZR20		95Y	BSW	9.8	26.8	50	1521	9	8.5		560 A A
		275/40ZR20		106W	BSW	10.9	28.7	50	2094	9	9.5		560 A A
		245/45ZR20		103W	BSW	9.6	28.7	50	1929	9	8		560 A A
		275/45ZR20		110Y	BSW	10.7	29.8	50	2337	9	9		560 A A
		245/50ZR20		105W	BSW	10.0	29.7	50	2039	9	7.5		560 A A
		285/50R20		116V	BSW	11.7	31.3	50	2756	9	9		560 A A
		255/50ZR20		109W	BSW	10.4	30.1	50	2271	9	8		560 A A
		275/55ZR20		117W	BSW	11.2	31.9	50	2833	9	8.5		560 A A



HAILSTORM

Hailstorm | HS-001 | All-season - UHP

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
21		305/30ZR21		104Y	BSW	12.3	28.2	50	1984	9	11		560 A A
		245/35ZR21		96Y	BSW	9.8	27.8	50	1565	9	8.5		560 A A
		255/35ZR21		98Y	BSW	10.2	28.0	50	1653	9	9		560 A A
		265/35ZR21		101Y	BSW	10.7	28.3	50	1819	9	9.5		560 A A
		275/35ZR21		103Y	BSW	10.9	28.5	50	1929	9	9.5		560 A A
		285/35ZR21		105Y	BSW	11.4	28.9	50	2039	9	10		560 A A
		315/35ZR21		111Y	BSW	12.6	29.6	50	2403	9	11		560 A A
		245/40ZR21		100Y	BSW	9.8	28.7	50	1764	9	8.5		560 A A
		275/40ZR21		107Y	BSW	10.9	29.6	50	2149	9	9.5		560 A A
		285/40ZR21		109Y	BSW	11.4	30.0	50	2271	9	10		560 A A
		285/45ZR21		113Y	BSW	11.2	31.1	50	2535	9	9.5		560 A A
		265/35ZR22		102Y	BSW	10.7	29.3	50	1874	9	9.5		560 A A
22		265/40ZR22		106W	BSW	10.7	30.4	50	2094	9	9.5		560 A A
		285/40ZR22		110Y	BSW	11.4	31.0	50	2337	9	10		560 A A
		305/40ZR22		114W	BSW	12.3	31.6	50	2601	9	11		560 A A
		285/45ZR22		114Y	BSW	11.2	32.1	50	2601	9	9.5		560 A A
		305/45ZR22		118W	BSW	11.9	32.8	50	2910	9	10		560 A A
		275/55R22		116V	BSW	11.2	33.9	50	2756	9	8.5		560 A A
24		295/35ZR24		110Y	BSW	11.9	32.1	50	2337	9	10.5		560 A A
		305/35ZR24		112Y	BSW	12.3	32.4	50	2469	9	11		560 A A



SANDSTORM

■ **SS-001**

All-Season - HP

Popular Choice with Balanced Performance

■ FEATURES



Rim Diameter

Aspect Ratio

Tread Pattern



'14-20'



'60-75'



Symmetric

Treadwear	Traction	Temperature	Speed	Load Index
600	A	A	THV	----
680	A	A	HV	

Benefits

- Ultimate grip. Excellent dry and wet handling.
- Variabale pitch design
- Closed shoulder design
- Superior wear resistance
- Deliver a quiet driving experience



SANDSTORM

Sandstorm | SS-001 | All-Season - HP

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
14		165/60R14		75H	BSW	6.7	21.8	51	853	9	5		600 A A
		185/60R14		82H	BSW	7.4	22.8	51	1047	9	5.5		600 A A
		205/60R14		88H	BSW	8.2	23.7	51	1235	10	6		600 A A
		165/65R14		79T	BSW	6.7	22.4	51	963	9	5		600 A A
		175/65R14		82H	BSW	7.0	23.0	51	1047	9	5		600 A A
		185/65R14		86H	BSW	7.4	23.5	51	1168	9	5.5		600 A A
		165/70R14		81T	BSW	6.7	23.1	51	1019	9	5		600 A A
		175/70R14		84T	BSW	7.0	23.7	51	1102	9	5		600 A A
		185/70R14		88H	BSW	7.4	24.3	51	1235	9	5.5		600 A A
		195/70R14		91H	BSW	7.9	24.8	51	1356	10	6		600 A A
		175/75R14		86T	BSW	7.0	24.3	51	1168	9	5		600 A A
		185/55R15		82V	BSW	7.4	24.4	51	1047	9	5.5		600 A A
		175/60R15		81H	BSW	7.0	23.3	51	1019	9	5		600 A A
		185/60R15		88H	BSW	7.6	23.0	50	1235	9	6		600 A A
		195/60R15		88V	BSW	7.9	24.2	51	1235	10	6		600 A A
15		205/60R15		91V	BSW	8.2	24.7	51	1356	10	6		600 A A
		175/65R15		88H	BSW	7.0	24.0	50	1235	9	5		600 A A
		185/65R15		88H	BSW	7.4	23.7	51	1235	9	5.5		600 A A
		195/65R15		95V	BSW	7.9	25.0	50	1521	10	6		600 A A
		205/65R15		99V	BSW	8.2	25.5	50	1709	10	6		600 A A
		205/70R15		96H	BSW	8.2	26.3	51	1565	10	6		600 A A
		215/70R15		98T	BSW	8.7	26.9	51	1653	10	6.5		600 A A
		225/70R15		100T	BSW	9.0	27.4	51	1764	10	6.5		600 A A
		235/70R15		106H	BSW	9.4	28.0	50	2094	10	7		600 A A
		215/75R15		100T	BSW	8.5	27.7	51	1764	10	6		600 A A
		225/75R15		102T	BSW	8.8	28.3	51	1874	10	6		600 A A
		235/75R15		109T	BSW	9.3	28.9	50	2271	10	6.5		600 A A
		185/55R16		87V	BSW	7.6	24.0	50	1201	9	6		600 A A
		195/60R16		89H	BSW	7.9	25.2	51	1279	10	6		600 A A
		205/60R16		96V	BSW	8.2	25.7	50	1565	10	6		600 A A
16		215/60R16		99V	BSW	8.7	26.1	50	1709	10	6.5		600 A A
		225/60R16		102V	BSW	9.0	26.6	50	1874	10	6.5		600 A A
		235/60R16		100V	BSW	9.4	27.1	51	1764	10	7		600 A A
		205/65R16		95V	BSW	8.2	26.5	51	1521	10	6		600 A A
		215/65R16		102H	BSW	8.7	27.0	50	1874	10	6.5		600 A A
		225/65R16		100H	BSW	9.0	27.5	51	1764	10	6.5		600 A A
		235/65R16		107H	BSW	9.4	28.0	50	2149	10	7		600 A A
		215/70R16		100H	BSW	8.7	27.9	51	1764	10	6.5		600 A A
		225/70R16		103H	BSW	9.0	28.4	51	1929	10	6.5		600 A A
		235/70R16		109H	BSW	9.4	29.0	50	2271	10	7		600 A A
		225/75R16		104T	BSW	8.8	29.3	51	1984	10	6		600 A A
		235/75R16		112T	BSW	9.3	29.8	50	2469	10	6.5		600 A A
		205/60R17		93H	BSW	8.2	26.7	51	1433	10	6		600 A A
		215/60R17		100V	BSW	8.7	27.2	50	1764	10	6.5		600 A A
		225/60R17		99V	BSW	9.0	27.6	51	1709	10	6.5		680 A A
17		235/60R17		102V	BSW	9.4	28.1	51	1874	10	7		680 A A
		215/65R17		103V	BSW	8.7	28.0	50	1929	10	6.5		600 A A
		225/65R17		102H	BSW	9.0	28.5	51	1874	10	6.5		680 A A
		235/65R17		108H	BSW	9.4	29.1	50	2205	10	7		680 A A



SANDSTORM

Sandstorm | SS-001 | All-Season - HP

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
18		225/60R18		104V	BSW	9.0	28.6	50	1984	10	6.5		680 A A
		235/60R18		107V	BSW	9.4	29.1	50	2149	10	7		680 A A
		245/60R18		105V	BSW	9.8	29.6	51	2039	10	7		680 A A
		255/60R18		112H	BSW	10.2	30.0	50	2469	10	7.5		680 A A
		265/60R18		114H	BSW	10.7	30.5	50	2601	10	8		680 A A
		285/60R18		116H	BSW	11.5	31.5	51	2756	10	8.5		680 A A
19		255/60R19		113V	BSW	10.2	31.1	50	2535	10	7.5		680 A A
20		275/60R20		115H	BSW	11.0	33.0	51	2679	10	8		680 A A





DUSTSTORM

■ **DS-001**

PCR & LTR - HT

Highway Terrain Tires Traveling On The Road



■ FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'15-20'



'60-85'



Symmetric

Treadwear	Tracti on	Temperature	Speed	Load Index
680	A	B	TH	----
			LQS (LT)	----

Benefits

- Ultimate grip. Excellent dry and wet handling.
- Variabale pitch design
- Closed shoulder design
- Superior wear resistance
- Deliver a quiet driving experience



DUSTSTORM

Dust Storm | DS-001 | PCR & LTR- HT

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
15		265/70R15		112T	BSW	10.7	29.6	51	2469	11	8		680 A B
		265/75R15		112T	BSW	10.5	30.7	51	2469	11	7.5		680 A B
		255/65R16		109H	BSW	10.2	29.1	51	2271	11	7.5		680 A B
		245/70R16		111H	BSW	9.8	29.5	50	2403	11	7		680 A B
16		255/70R16		111T	BSW	10.2	30.1	51	2403	11	7.5		680 A B
		265/70R16		112H	BSW	10.7	30.6	51	2469	11	8		680 A B
		275/70R16		114T	BSW	11.0	31.2	51	2601	11	8		680 A B
		245/75R16		111T	BSW	9.8	30.5	51	2403	11	7		680 A B
		265/75R16		116T	BSW	10.5	31.7	51	2756	11	7.5		680 A B
		255/60R17		106H	BSW	10.2	29.1	51	2094	11	7.5		680 A B
		265/60R17		108H	BSW	10.7	29.5	51	2205	11	8		680 A B
		275/60R17		110V	BSW	11.0	30.0	51	2337	11	8		680 A B
17		285/60R17		114H	BSW	11.5	30.5	51	2601	11	8.5		680 A B
		245/65R17		111H	BSW	9.8	29.5	50	2403	11	7		680 A B
		255/65R17		110H	BSW	10.2	30.1	51	2337	11	7.5		680 A B
		265/65R17		112H	BSW	10.7	30.6	51	2469	11	8		680 A B
		275/65R17		115H	BSW	11.0	31.1	51	2679	11	8		680 A B
		285/65R17		116H	BSW	11.5	31.6	51	2756	11	8.5		680 A B
		245/70R17		110T	BSW	9.8	30.6	51	2337	11	7		680 A B
		255/70R17		112T	BSW	10.2	31.1	51	2469	11	7.5		680 A B
		265/70R17		115T	BSW	10.7	31.7	51	2679	11	8		680 A B
		235/65R18		110H	BSW	9.4	30.0	50	2337	11	7		680 A B
18		265/65R18		114H	BSW	10.7	31.5	51	2601	11	8		680 A B
		275/65R18		116H	BSW	11.0	32.1	51	2756	11	8		680 A B
		255/70R18		113H	BSW	10.2	32.1	51	2535	11	7.5		680 A B
		265/70R18		116T	BSW	10.7	32.6	51	2756	11	8		680 A B
		235/65R16C	E/10PR	121/119S	BSW	9.4	28.0	83	3197	12	7		
16		LT225/75R16	E/10PR	115/112S	BSW	8.8	29.3	80	2680	12	6		
		LT245/75R16	E/10PR	120/116S	BSW	9.8	30.5	80	3042	12	7		
		LT265/75R16	E/10PR	123/120S	BSW	10.5	31.7	80	3415	13	7.5		
		LT205/85R16	F/12PR	117/115L	BSW	8.1	30.0	95	2835	12	5.5		
		LT215/85R16	E/10PR	115/112Q	BSW	8.5	30.4	80	2680	12	6		
		LT235/85R16	E/10PR	120/116Q	BSW	9.3	31.7	80	3042	12	6.5		
17		LT245/70R17	E/10PR	119/116S	BSW	9.8	30.6	80	3000	12	7		
		LT265/70R17	E/10PR	123/120S	BSW	10.7	31.7	80	3415	13	8		
		LT245/75R17	E/10PR	121/118S	BSW	9.8	31.5	80	3195	12	7		
		LT235/80R17	E/10PR	120/117Q	BSW	9.3	31.8	80	3085	12	6.5		
18		LT275/65R18	E/10PR	123/120S	BSW	11.0	32.1	80	3415	13	8		
		LT275/70R18	E/10PR	125/122S	BSW	11.0	33.2	80	3640	13	8		
20		LT265/60R20	E/10PR	121/118S	BSW	10.7	32.5	80	3195	13	8		
		LT285/60R20	E/10PR	125/122S	BSW	11.5	33.5	80	3640	14	8.5		
		LT275/65R20	E/10PR	126/123S	BSW	11.0	34.1	80	3750	13	8		



WINDSTORM

■ **WS-001**

PCR & LTR - AT

All - Terrain Tires Make Adventure Joyfull On & Off - Road



■ FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'15-20'



'60-85'



Symmetric

Treadwear	Traction	Temperature	Speed	Load Index
600	A	B	TH	----
			S (LT)	----

Benefits

- Enhance off-road capability
- Stone ejection design
- Rigid and flexible block design
- High-strength tread formula. effectively reducing bouncing and chunking
- Rib groove design on block surface for better cooling effect
- Robust durability



WINDSTORM

Windstorm | WS-001 | PCR & LTR-AT

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
15		205/70R15		96T	ROBL	8.2	26.3	51	1565	12	6		660 A B
		235/75R15		109T	ROBL	9.3	28.9	50	2271	12	6.5		660 A B
16		205/60R16		92H	ROBL	8.2	25.7	51	1389	12	6		660 A B
		215/65R16		102T	ROBL	8.7	27.0	50	1874	12	6.5		660 A B
		205/70R16		97H	ROBL	8.2	27.3	51	1609	12	6		660 A B
		215/70R16		100T	ROBL	8.7	27.9	51	1764	12	6.5		660 A B
		245/70R16		111T	ROBL	9.8	29.5	50	2403	13	7		660 A B
		265/70R16		112T	ROBL	10.7	30.6	51	2469	13	8		660 A B
17		265/75R16		116T	ROBL	10.5	31.7	51	2756	13	7.5		660 A B
		225/55R17		101H	ROBL	9.2	26.8	50	1819	12	7		660 A B
		235/55R17		103H	ROBL	9.6	27.2	50	1929	12	7.5		660 A B
		215/60R17		100H	ROBL	8.7	27.2	50	1764	12	6.5		660 A B
		225/60R17		99H	ROBL	9.0	27.6	51	1709	12	6.5		660 A B
		235/60R17		102H	ROBL	9.4	28.1	51	1874	12	7		660 A B
		215/65R17		103H	ROBL	8.7	28.0	50	1929	12	6.5		660 A B
		225/65R17		102T	ROBL	9.0	28.5	51	1874	12	6.5		660 A B
		235/65R17		108T	ROBL	9.4	29.1	50	2205	12	7		660 A B
		245/65R17		111T	ROBL	9.8	29.5	50	2403	13	7		660 A B
18		265/65R17		116T	ROBL	10.7	30.6	50	2756	13	8		660 A B
		265/70R17		115T	ROBL	10.7	31.7	51	2679	13	8		660 A B
		235/50R18		101H	ROBL	9.6	27.3	50	1819	12	7.5		660 A B
		225/55R18		102H	ROBL	9.2	27.8	50	1874	12	7		660 A B
		235/55R18		104H	ROBL	9.6	28.1	50	1984	12	7.5		660 A B
		255/55R18		109V	ROBL	10.4	29.0	50	2271	13	8		660 A B
		225/60R18		104H	ROBL	9.0	28.6	50	1984	12	6.5		660 A B
		265/60R18		114H	ROBL	10.7	30.5	50	2601	13	8		660 A B
		235/65R18		110T	ROBL	9.4	30.0	50	2337	12	7		660 A B
		255/65R18		111T	ROBL	10.2	31.1	51	2403	13	7.5		660 A B
19		265/65R18		114T	ROBL	10.7	31.5	51	2601	13	8		660 A B
		275/65R18		116T	ROBL	11.0	32.1	51	2756	13	8		660 A B
		225/55R19		103H	ROBL	9.2	28.8	50	1929	12	7		660 A B
		235/55R19		105H	ROBL	9.6	29.2	50	2039	12	7.5		660 A B
		245/55R19		107H	ROBL	10.0	29.6	50	2149	13	7.5		660 A B
		255/55R19		111H	ROBL	10.4	30.0	50	2403	13	8		660 A B
20		255/60R19		113T	ROBL	10.2	31.1	50	2535	13	7.5		660 A B
		245/50R20		105H	ROBL	10.0	29.7	50	2039	13	7.5		660 A B
		255/50R20		109H	ROBL	10.4	30.1	50	2271	13	8		660 A B
		265/50R20		111H	ROBL	10.9	30.5	50	2403	13	8.5		660 A B
		255/55R20		110H	ROBL	10.4	31.0	50	2337	13	8		660 A B
		275/55R20		117H	ROBL	11.2	31.9	50	2833	13	8.5		660 A B
22		275/60R20		115T	ROBL	11.0	33.0	51	2679	13	8		660 A B
		285/45R22		114H	ROBL	11.2	32.1	50	2601	13	9.5		660 A B



WINDSTORM

Windstorm | WS-001 | PCR & LTR-AT

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
15		LT235/75R15	C/6PR	104/101S	ROBL	9.3	28.9	50	1985	14	6.5		
		31X10.5R15LT	C/6PR	109S	ROBL	10.6	30.5	50	2270	15	8.5		
		235/65R16C	E/10PR	121/119S	ROBL	9.4	28.0	83	3197	14	7		
16		LT305/70R16	E/10PR	124/121S	ROBL	12.2	32.8	65	3525	15	9		
		LT225/75R16	E/10PR	115/112S	ROBL	8.8	29.3	80	2680	14	6		
		LT245/75R16	E/10PR	120/116S	ROBL	9.8	30.5	80	3042	15	7		
		LT265/75R16	E/10PR	123/120S	ROBL	10.5	31.7	80	3415	15	7.5		
		LT285/75R16	E/10PR	126/123S	ROBL	11.3	32.8	80	3750	15	8		
		LT315/75R16	E/10PR	127/124S	ROBL	12.3	34.6	65	3860	15	8.5		
		LT235/85R16	E/10PR	120/116S	ROBL	9.3	31.7	80	3042	14	6.5		
		LT265/65R17	E/10PR	120/117S	ROBL	10.7	30.6	80	3085	15	8		
		LT245/70R17	E/10PR	119/116S	ROBL	9.8	30.6	80	3000	15	7		
17		LT265/70R17	E/10PR	123/120S	ROBL	10.7	31.7	80	3415	15	8		
		LT285/70R17	E/10PR	126/123S	ROBL	11.5	32.8	80	3750	15	8.5		
		LT295/70R17	E/10PR	128/125S	ROBL	11.8	33.3	80	3970	15	8.5		
		LT305/70R17	E/10PR	125/122S	ROBL	12.2	33.9	65	3640	15	9		
		LT315/70R17	E/10PR	126/123S	ROBL	12.7	34.4	65	3750	15	9.5		
		LT245/75R17	E/10PR	121/118S	ROBL	9.8	31.5	80	3195	15	7		
		LT235/80R17	E/10PR	120/117S	ROBL	9.3	31.8	80	3085	14	6.5		
		33X12.5R17LT	E/10PR	120S	ROBL	12.5	32.5	65	3085	15	10		
		35X12.5R17LT	E/10PR	125S	ROBL	12.5	34.5	65	3640	15	10		
18		LT265/60R18	E/10PR	119/116S	ROBL	10.7	30.5	80	3000	15	8		
		LT275/65R18	E/10PR	123/120S	ROBL	11.0	32.1	80	3415	15	8		
		LT265/70R18	E/10PR	124/121S	ROBL	10.7	32.6	80	3525	15	8		
		LT275/70R18	E/10PR	125/122S	ROBL	11.0	33.2	80	3640	15	8		
		33X12.5R18LT	E/10PR	118S	ROBL	12.5	32.5	65	2910	15	10		
		35X12.5R18LT	E/10PR	123S	ROBL	12.5	34.5	65	3415	15	10		
20		LT305/55R20	E/10PR	121/118S	ROBL	12.4	33.2	65	3195	15	9.5		
		LT275/65R20	E/10PR	126/123S	ROBL	11.0	34.1	80	3750	15	8		
		33X12.5R20LT	E/10PR	114S	ROBL	12.5	32.5	65	2600	15	10		
		35X11.5R20LT	E/10PR	124S	ROBL	11.4	34.5	80	3525	15	9		
		35X12.5R20LT	E/10PR	121S	ROBL	12.5	34.5	65	3195	15	10		
22		33X12.5R22LT	E/10PR	109S	ROBL	12.4	32.5	65	2270	15	10		
		35X12.5R22LT	E/10PR	117S	ROBL	12.5	34.5	65	2835	15	10		
24		33X12.5R24LT	E/10PR	101S	ROBL	12.6	32.5	65	1820	15	11.5		
		35X12.5R24LT	E/10PR	111S	ROBL	12.4	34.5	65	2405	15	10.5		



TROPICALSTORM

■ TP-001

LTR-RT

Rugged Terrain. Tires Perfectly Balance Off-Road Performance



■ FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'17-24'



'50-75'



Symmetric

Treadwear	Traction	Temperature	Speed	Load Index
			Q (LT)	----

Benefits

- Stepped shoulder design for superior off-road capability
- Unique stone ejection and mud shedding technology employed for blocks and grooves
- Rigid and flexible block design
- High-strength tread formula. effectively reducing bouncing and chunking
- Rib groove design on block surface for better cooling effect.
- Robust durability.



TROPICALSTORM

Tropical Storm | TP-001 | LTR-RT

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
17		LT265/65R17	E/10PR	120/117Q	ROBL	10.7	30.6	80	3085	16	8		
		LT305/65R17	E/10PR	121/118Q	ROBL	12.2	32.6	65	3195	17	9		
		LT265/70R17	E/10PR	123/120Q	ROBL	10.7	31.7	80	3415	16	8		
		LT285/70R17	E/10PR	126/123Q	ROBL	11.5	32.8	80	3750	17	8.5		
		LT295/70R17	E/10PR	128/125Q	ROBL	11.8	33.3	80	3970	17	8.5		
		LT315/70R17	E/10PR	126/123Q	ROBL	12.7	34.4	65	3750	17	9.5		
		LT285/75R17	E/10PR	128/125Q	ROBL	11.3	33.9	80	3970	17	8		
		33X12.5R17LT	E/10PR	120Q	ROBL	12.5	32.5	65	3085	17	10		
18		35X12.5R17LT	E/10PR	125Q	ROBL	12.5	34.5	65	3640	17	10		
		LT265/60R18	E/10PR	119/116Q	ROBL	10.7	30.5	80	3000	16	8		
		LT275/65R18	E/10PR	123/120Q	ROBL	11.0	32.1	80	3415	16	8		
		LT275/70R18	E/10PR	125/122Q	ROBL	11.0	33.2	80	3640	16	8		
		33X12.5R18LT	E/10PR	118Q	ROBL	12.5	32.5	65	2910	17	10		
20		35X12.5R18LT	E/10PR	123Q	ROBL	12.5	34.5	65	3415	17	10		
		LT285/50R20	E/10PR	119/116Q	ROBL	11.7	31.3	80	3000	17	9		
		LT275/55R20	E/10PR	120/117Q	ROBL	11.2	31.9	80	3085	16	8.5		
		LT285/55R20	E/10PR	122/119Q	ROBL	11.7	32.4	80	3305	17	9		
		LT305/55R20	E/10PR	121/118Q	ROBL	12.4	33.2	65	3195	17	9.5		
		LT285/60R20	E/10PR	125/122Q	ROBL	11.5	33.5	80	3640	17	8.5		
		LT275/65R20	E/10PR	126/123Q	ROBL	11.0	34.1	80	3750	16	8		
		33X11.5R20LT	E/10PR	118Q	ROBL	11.4	32.5	80	2910	17	9		
22		33X12.5R20LT	E/10PR	114Q	ROBL	12.5	32.5	65	2600	17	10		
		35X12.5R20LT	E/10PR	121Q	ROBL	12.5	34.5	65	3195	17	10		
		33X12.5R22LT	E/10PR	109Q	ROBL	12.4	32.5	65	2270	17	10		
		35X12.5R22LT	E/10PR	117Q	ROBL	12.5	34.5	65	2835	17	10		
24		33X13.5R24LT	E/10PR	109Q	ROBL	13.4	32.5	65	2270	17	12		
		35X13.5R24LT	E/10PR	112Q	ROBL	13.4	34.5	65	2470	17	12		



STORM RIDER

■ **SR-001**

Mud Terrain Tires Superior Extreme Off-Road Performance

LTR-MT



■ FEATURES

Rim Diameter

Aspect Ratio

Tread Pattern



'16-22'



'70-75'



Symmetric

Treadwear	Traction	Temperature	Speed	Load Index
			Q (LT)	----

Benefits

- Enhance off-road capability
- Stone ejection design
- Rigid and flexible block design
- High-strength tread formula. effectively reducing bouncing and chunking
- Rib groove design on block surface for better
- Robust durability



STORM RIDER

Rim Dia (in)	TORNADO No.	Tyre Size	Load Range	LI/SS	Sidewall	Section Width inch	Overall Diameter inch	Max. Pressure psi	Max. Load lbs	Tread Depth 32nds	Rim	Revs/ Mile	UTQG
16		LT265/70R16	E/10PR	121/118Q	ROBL	10.7	30.6	80	3195	18	8		
		LT265/75R16	E/10PR	123/120Q	ROBL	10.5	31.7	80	3415	18	7.5		
		LT285/75R16	E/10PR	126/123Q	ROBL	11.3	32.8	80	3750	19	8		
17		LT265/70R17	E/10PR	123/120Q	ROBL	10.7	31.7	80	3415	18	8		
		LT285/70R17	E/10PR	126/123Q	ROBL	11.5	32.8	80	3750	19	8.5		
		33X12.5R17LT	E/10PR	120Q	ROBL	12.5	32.5	65	3085	19	10		
18		33X12.5R18LT	E/10PR	118Q	ROBL	12.5	32.5	65	2910	19	10		
20		33X12.5R20LT	E/10PR	114Q	ROBL	12.5	32.5	65	2600	19	10		
		35X12.5R20LT	E/10PR	121Q	ROBL	12.5	34.5	65	3195	19	10		
22		35X12.5R22LT	E/10PR	117Q	ROBL	12.5	34.5	65	2835	19	10		
		33X12.5R22LT	E/10PR	109Q	ROBL	12.4	32.5	65	2270	19	10		



BORN FROM THE STORM
BUILT FOR
THE ROAD



Visit us at: 12940 NW SOUTH RIVER DR.
MEDLEY, FL 33178

Contact us at: (305) 593.2028



TORNADO

TEL: 1+ (305) 593.2083

12940 NW SOUTH RIVER DR, MEDLEY, FL 33178

Limited Warranty

Warranty Table		
35k Mile Warranty	55k Mile Warranty	60k Mile Warranty
TS001	HS001	DS001
	SS001	WS001

ELIGIBILITY FOR LIMITED WARRANTY COVERAGE

You must be the original purchaser on or after January 1, 2019, of a warranted tire & the tire must have been continuously installed on the vehicle on which it was first installed. Your sales receipt is your proof of purchase & proof of the vehicle upon which the tire was originally installed. This Limited Warranty is not transferable to another vehicle or to another person. This warranty does not cover tires installed on a commercial vehicle or a vehicle put in commercial use.

To be & remain eligible for the Tread Life portion of your Limited Warranty, you must present proof that you have rotated the tire, in accordance with the prescribed rotation pattern, at least every 6,000 miles following installation.

LIMITED TREAD LIFE WARRANTY ON SPECIFIC *TORNADO* TIRES

No tire manufacturer or dealer can assure that you will achieve a certain number of driven miles or months of use from a given tire because driving habits, road & driving conditions, & vehicle maintenance & condition all play a role in tire tread life & all differ with each purchaser. However, the TORNADO tire lines listed in the Tread Life Warranty Table at the end of this Limited Warranty are warranted for a specified number of actual miles driven or months of installation ("Tread Life") on the original vehicle, whichever first occurs. The TORNADO tire lines not specifically identified in the Tread Life Warranty Table are not covered by a Tread Life Limited Warranty & are only warranted against defects in material & workmanship.



If you purchased an TORNADO tire identified in the Tread Life Warranty Table & the tire wears evenly but fails to provide the number of warranted miles or months of use, whichever first occurs, you are entitled to receive a prorated allowance applicable to the purchase price of a comparable new replacement TORNADO tire. The amount of the warranty replacement allowance is based on the “Useable Tread Life” of each warranted TORNADO tire line. The amount of the allowance will be equal to the percentage of the warranted Useable Tread Life remaining (months or miles, whichever first occurs) when the end of tire’s Useable Tread Life has been reached.

A tire’s “Useable Tread Life” is the original tread groove depth down to the treadwear safety indicator bars that are molded into the tire groove. The treadwear indicators are reached when only 2/32nds of an inch of tire tread remains. A tire has delivered its full “Useable Tread Life” when its original new tire tread has become worn down to the treadwear indicators at 2/32” (1.6 millimeters) of tread remaining. Tires become unsafe for use & must be replaced to avoid accident or injury when the tread depth remaining is 2/32” or less. The Limited Tread Life Warranty does not cover & you are responsible for the charges for mounting & balancing the replacement tire, and applicable taxes.

LIMITED WARRANTY AGAINST DEFECTS IN WORKMANSHIP & MATERIALS

All ADVANCE tire lines are warranted against failures due to defects in workmanship & materials for the life of the original tread, or 5 years from the date of purchase, (whichever occurs first).

A no-charge warranty replacement is available for all TORNADO tire lines if a defect in material or workmanship occurs during the first 2/32nds of an inch of Useable Tread or within 12 months, from the date of purchase (whichever occurs first). If you are entitled to receive a no-charge warranty replacement tire, the mounting & balancing of that tire will also be provided at no charge.

If an TORNADO tire fails due to a defect in workmanship or materials after the applicable no-charge replacement period specified above for the TORNADO tire line you purchased, you will be entitled to a prorated allowance applicable to the purchase price of a comparable new TORNADO tire. This replacement tire allowance will be prorated &



calculated by dividing the number of 32nds of Useable Tread remaining when the tire is presented for warranty replacement (rounding to the nearest 32nd of an inch) by the total number of 32nds of an inch of Useable Tread. You will be responsible for the charges applicable for mounting, balancing & taxes for the warranty replacement tire when the

tire fails due to defects in material or workmanship after your TORNADO tire line no-charge replacement period has ended. Once the Useable Tread of an TORNADO tire has been exhausted, this warranty for defects in material & workmanship has also been exhausted & the benefits of the Limited Warranty terminate.

LIMITED RIDE DISTURBANCE WARRANTY

If you experience “Ride Disturbance” attributable solely to the TORNADO tire you purchased during the first 2/32nds of an inch of Useable Tread Life, we will replace the tire causing the Ride Disturbance with a comparable new TORNADO tire without charge for the replacement tire, mounting, balancing or taxes. “Ride Disturbance” occurs when a tire does not deliver a satisfactory ride or displays an unsatisfactory road handling characteristic that is attributable solely to the tire. Ride Disturbance may be caused by many other mechanical issues, including improper alignment & failing shock absorbers & brakes. Normally, Ride Disturbance should not be present when tires are properly mounted & balanced & never occurs on all four tires. Therefore, a Ride Disturbance Warranty will not apply to all four tires. Ride Disturbance warranty claims will not be honored after the first 2/32nds of an inch of Useable Tread wear has occurred.

WARRANTY EXCLUSIONS & LIMITATIONS

The exclusions & limitations on the applicability of the Limited Warranty set forth in this section & the other Limited Warranties set forth in other sections should be read carefully because they determine whether you are entitled to a warranty replacement or a warranty replacement allowance. The Limited Warranties for the TORNADO tire you purchased do not apply if one of the following conditions applies or the tire failed because: tires installed on a vehicle registered or normally used outside the United States & Canada



The tire was installed on a commercial or commercial use vehicle (e.g., limousine)
The tire was installed on a recreational vehicle (e.g., camping & Motor homes)

the tire was transferred to another vehicle after it was originally installed

tires installed on a vehicle with a malfunctioning odometer

the tire is branded as “Blemish”, or “NA” or the molded DOT number has been removed or disfigured

the tire was repaired in a manner that does not comply with the U.S. Tire Manufacturers Association (USTMA) standards

tires that are a different size than recommended for your vehicle

Road hazard (outside of the Road Hazard Replacement Program parameters), collision damage, improper mounting or balancing, vandalism, theft, racing, off road use (forestry roads, gravel, rock) and misapplication of the tire to vehicle.

over & under inflation, overloading, or failure to maintain proper tire pressure

addition of liquids, solids or gases (other than air, nitrogen, carbon dioxide)

ozone or weather cracks or checking occurring four (4) years after the date of purchase or, if that proof is not available, four (4) years after the DOT serial date

vehicle mechanical failures, improper alignment, brake & shock failure, or

improperly aligned tires causing “irregular treadwear” (i.e. tread groove depth difference of 2/32nds of an inch or more on the same tire)

the wheel on which the tire is mounted is defective or fails

alteration of tread design to improve traction or grinding to improve uniformity, or sidewall inlays

Winter tires must be used during winter months only. These include the months of September through April, defined as a period beginning on or after September 1st of a given year and ending no later than April 30th of the following year.

OWNER OBLIGATIONS (All Limited Warranties)

It is your obligation to present the tire for which you are seeking a warranty replacement or allowance to the seller of the tires. Until a tire is accepted by the dealer for warranty replacement or allowance, the tire remains the responsibility of the purchaser. Once the tire is accepted by the dealer for Limited Warranty replacement or allowance, you agree to relinquish all ownership & all rights to the tire. If there is a dispute with respect to the



TORNADO

TEL: 1+ (305) 593.2083

12940 NW SOUTH RIVER DR, MEDLEY, FL 33178

application of this warranty you must make the tire available for further inspection. When you purchased your TORNADO tire, the dealer presented you with proof of its purchase in the form of a sales receipt, warranty registration form, & this Limited Warranty Booklet. That receipt is also recorded & provides proof of important information that you must present when you seek the benefits of the Limited Warranties. You should retain the purchase receipt because no warranty claim will be accepted by your TORNADO dealer unless you retain & present the following to the dealer when you seek the benefits of this limited warranty:

- proof of your purchase of the TORNADO tire presented
- proof of the date of your purchase (if neither is presented the date of manufacture will be used for the purposes of this Limited Warranty)
- proof as to the vehicle on which this tire was mounted
- the mileage of the vehicle on which this tire was mounted on the date of purchase
- proof that the tire was properly rotated at the required intervals when a Tread Life Warranty claim is presented

LEGAL RIGHTS

This Limited Warranty gives you legal rights, & you may have additional legal rights under applicable federal statutes & regulations or state law. Your legal rights under state law may vary state to state. To the extent permitted by the laws of your state, this Limited Warranty does not cover & expressly exclude any coverage for personal injury, property damage, loss of time, inconvenience, loss of use of your vehicle or tire, or any other incidental or consequential damages. No express warranty is given other than those expressly stated in this Limited Warranty booklet. Any implied warranty for merchantability, fitness for a particular purpose or otherwise, is limited in duration & expires when the tire's Useable Tread is exhausted as specified in this limited warranty. No implied warranty of merchantability, fitness for a particular purpose or otherwise, is given on tires used on commercial vehicles or for commercial use vehicles. This is the only warranty that applies to the TORNADO tires purchased by you & supersedes & replaces the terms of any previous



warranty. Our company neither assumes nor extends, nor authorizes any other person or entity to assume or extend on its behalf, any other or different warranty obligation.

IMPORTANT SAFETY WARNINGS & INFORMATION

TORNADO tire owners should follow these safety tips to help avoid serious accidents & injury:

Tire under inflation, over inflation or overloading can cause tire failure (you must adhere to directions in the manufacturer's owner's manual or tire placard in the vehicle for proper tire pressures for the front & rear tires)

Be sure that the tire valve caps are all present & securely attached, the valve cap is one of the primary seals against air leaks

Tires should be mounted by only specially trained dealer personnel

Match the tire's diameter with the wheel rims' bead seat diameter (for example, a 15-inch tire must only be mounted on a 15-inch wheel)

Inflation pressure should be checked, using an accurate tire gauge, at least once a month & check pressure when the tire is cool; never bleed hot tires as it may lead to under inflation after cooling; but never allow children to check, inflate or deflate tires

Before towing a trailer, check with your dealer to determine proper tire sizing & pressures that may be required because of the trailer load

Check tires frequently for cuts, bulges, abnormal or uneven wear, abrasions, glass or metal debris & impact damage

Repairs to tires must always consist of a plug combined with a patch applied to the inside of the tire when the tire is removed from the wheel; plug repairs only are improper & are prone to leaks & sudden failures

Avoid road hazards, debris, curbs & potholes which can damage your tires, wheels & alignment

Never over inflate your tire & never exceed the maximum pressure & load molded in the tire sidewall & only inflate tire to maximum pressure when your tires are carrying the maximum load

Have tire punctures repaired by the trained personnel at an TORNADO dealer



If your vehicle is stuck in snow, mud, sand or is impeded by physical obstruction, such as a ditch, avoid excessive tire spinning; never exceed 35 miles an hour on the odometer when spinning a tire as the centrifugal force generated above that speed could result in tire deformation or explosion. Instead, use gentle forward & backward motion to free the vehicle

Best tire performance is achieved when all tires are of the same type & the size that is recommended by the vehicle manufacturer for the particular axle. Never mount radial ply tires on the same axle as non-radial ply tires; never mount radial tires on the front axle when non-radial tires are mounted on the rear axle as these conditions can create vehicle instability resulting in sudden loss of control, damage & injury

It is recommended that all four (4) tires on a passenger or light truck vehicle be replaced at the same time. However, when only two (2) tires are replaced, the new tires should be installed on the rear axle to achieve better driving performance & safety

Never drive on tires that have less than 2/32nds of an inch of tread remaining; replace tires as soon as the tread reaches the treadwear indicators molded into the tread grooves of the tire which reveal when the tread depth remaining is 2/32nds of an inch. Continued use creates a serious risk of tire failure, loss of control & serious injury

Never operate your vehicle at speeds above that posted or speeds that are not justified by the road conditions


APPROVED TIRE ROTATION PATTERNS*

None of the patterns illustrated shows rotation of a spare tire. "Temporary Use" or "Mini" spares cannot be included in a rotation pattern. A full size comparable spare tire (that is, same size & radial type) may be included in any of the patterns shown above by inserting the spare in the right rear position. The tire that would have moved to the right rear position becomes the spare.

*When rotating tires with a directional tread pattern, observe the arrows molded on the tire sidewall which show the direction the tire should turn. For vehicles that are equipped with



different size tires front to rear, refer to the vehicle manufacturer's rotation procedures in the vehicle owner's manual.

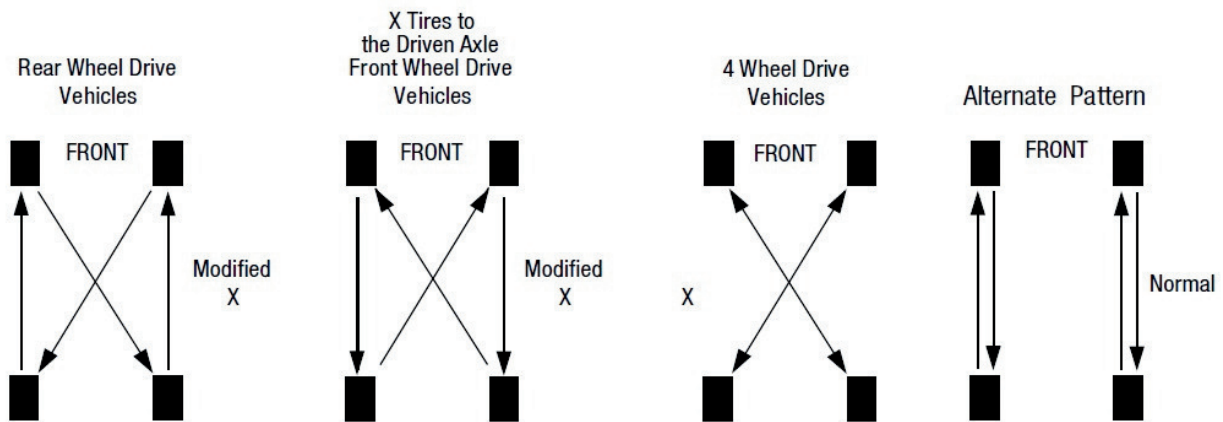

Procedure of Normal Claim Settlement

- a) Distributor shall apply for the claim settlement by submission of **CLAIM ON DAMAGE TIRE/TUBE/FLAP and TIRE FAILURE FIELD REPORT** (as attachment) with photos and/or other evidence showing the tire defects with cutting piece bearing DOT coding and the series number.
- b) Photos show clearly the defect part both outside and inside the casing, tire series number, and the whole tire with defect part. Total 4 photos for each claimed tire are needed.
- c) The submission of claim files shall be presented to GTC from 20th to 30th of each calendar month.
- d) GTC will confirm the acceptance of the claim within 10 working days after the receipt of the claim files. The accepted claims will be reimbursed by deduction from the invoice value.